

terratile® the proven solution for multi-purpose venues.




terratile® is manufactured from Translucent Virgin High Density Polyethylene (HDPE), that is not only very strong, it also allows sufficient light to pass through to ensure continuous photosynthesis – a **MUST** for the ultimate protection of the grass!

It incorporates an integral anti-slip top surface with specially designed, raised air holes that allow the turf to breathe but at the same time prevent liquids from penetrating to the turf below.




terratile® has radiussed webbing for maximum strength & patented round feet that lift the tile slightly from the turf thus minimising any 'cutting' of the turf.

It has an overlap which, when combined with the factory fitted pins and the locking cams delivers expansion/contraction capability whilst preventing rubbish & non-desirable liquids from passing through to the turf – whether natural or artificial.

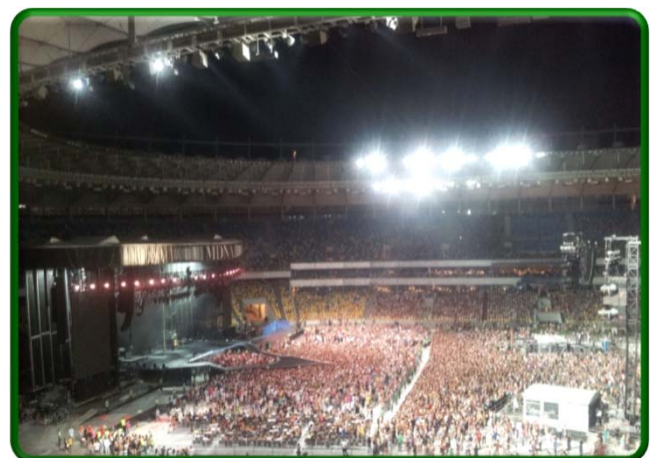

"Time is Money":..... from sports stadium to concert venue, & back again – the fastest turnaround possible!

terratile[®] specifications:

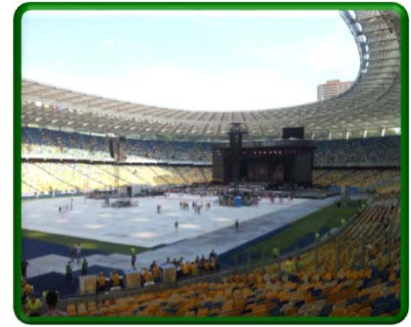

Dimensions	1m (39.37") x 1m(39.37") x 39mm (1½ "). Pinned together in blocks of four at the factory and shipped on pallets. Actual fitted size : 2m x 2m = 4m ² (6' 6" x 6' 6" = 42.25ft ²)
Weight	7.5 kgs per m ² /17.5lbs per tile /1.64lbs per ft ²
Material	High molecular weight, high density, polyethylene with UV stabiliser
Method of Manufacture	Injection moulded using a blowing agent, which produces an engineering foam moulding with strength enhancing cellular core
Temperature Range	-20°C to 45°C (-4°F to 113°F)
Static Loading	Point load 20mm diameter = 418kgs - 1" square = 1,893lbs Spread load 86kN /150mm sq 3,822kN / m ² - 70,546lbs / ft ² 634,919lbs / yd ²
Fire Requirements	See separate fire test report
Colours	Translucent natural material, which allows the passage of light, ensuring grass growth – without yellowing.
Cleaning	High pressure cold water spray washer
Life Expectancy	Guaranteed for 5 years but has a realistic life expectancy of c. 10 years
Slip Resistance	See separate slip test report


terrapias
 World's No.1 for **Turf** Protection
www.terrapias.com



Checkers Safety Group UK Ltd t/a Terrapias
 The Barn, Hall Farm House, High Street, Castle Donington, Derby. DE74 2PP UK
 Tel: +44(0)1332 812813 Fax: +44(0)1332 853410 Email: terrapias@checkers-safety.com