

## **terrtrak-WF<sup>®</sup>** (*With Feet*) is the ideal solution for protecting natural turf.

*Terraplas products are all specifically designed for use in stadiums and arenas to protect their quality turf, so that venues can host vital revenue-generating non-core events. The unmatched expertise of Terraplas plc has borne quality systems that allow facilities to accommodate high profile concerts and other events in quick succession with sporting fixtures, secure in the knowledge that their playing surface is not at risk.*

*Terraplas pioneered 'turf protection' over 26 years ago and since then have been continually proven internationally as the turf protection systems of choice for Stadiums and Arenas.*




Strategically designed for the protection of 'quality natural turf' when continuous photosynthesis and air circulation are required. This ensures good grass colour and health, when covered for a number of days for non-sporting events.

The top surface has an integrated very efficient anti-slip pattern. The slightly embossed design provides small channels to keep any spilt liquids away from the patrons feet, whilst being shallow enough not to be a trip hazard.

Each panel of 4 tiles connects to its adjacent panels by means of patented vertical camlock and bolt systems, which are manufactured from special nylon that is as strong as steel.

*Each tile incorporates a 100mm (4 inch) overlap, which is a very effective barrier that stops liquids from penetrating to the turf. This overlap also includes strategically designed 'location bosses' that make alignment of tiles for fitting and locking together really simple. Additionally they act as stabilisers to resist the tiles twisting under duress.*

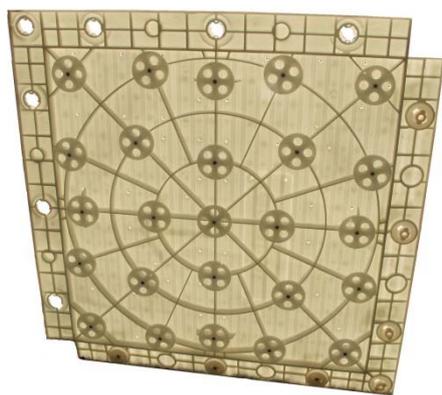

The innovative circular ribbing geometry of **terrtrak-WF<sup>®</sup>** combines strength with light weight. The specially designed ribs and patented feet spread the load evenly and any 'impressions' on lifting disappear after a short time, or during cutting.

This strategically constructed underside provides 33mm 'head room' allowing the grass blades to stand erect, preventing excessive stress.

**terrtrak-WF<sup>®</sup>** is fitted with 25 x patented circular feet that extend 10mm from the underside of the tile to create an air flow, which reduces disease.

The combination of quality materials, very strong camlocks & bolts, together with the structured ribbing & patented feet mean **terrtrak-WF<sup>®</sup>** can withstand the pressures of hordes of people, without damaging the turf.

***Two people lay a panel of 4 tiles of terrtrak-WF<sup>®</sup> at one time, covering 4.84m<sup>2</sup> (52ft<sup>2</sup>). This results in the fastest laying times of any product, which is reflected in substantially reduced labour costs and turnaround times.***

## terrtrak-WF<sup>®</sup> (With Feet) specifications:

<b>Dimensions</b>	Physical size: 1.21m (4') x 1.21m (4') x 38 mm (1½"). Prior to shipping <b>terrtrak-WF<sup>®</sup></b> tiles are bolted in panels of 4. The bolted panels are shipped on pallets. Each tile has a "Usable" top surface when fitted of 1.21m <sup>2</sup> (13.02ft <sup>2</sup> ), meaning a panel of 4 measures 4.84m <sup>2</sup> (52.ft <sup>2</sup> )
<b>Weight</b>	13kgs per tile (29lbs per tile) or 52kgs per panel of 4 (116lbs)
<b>Material</b>	Virgin High Density, Polyethylene with UV stabiliser ( <b>guaranteed for 30 years</b> )
<b>Method of Manufacture</b>	Structural foam Injection moulded using a blowing agent, which produces an engineering foam moulding with strength enhancing cellular core
<b>Temperature Range</b>	-20°C to 45°C (-4°F to 113°F)
<b>Static Loading</b>	Point load 20mm diameter = 560kgs - 1" square = 2,813lbs Spread load 88kN /150mm sq 3,910kN / m <sup>2</sup> - 80,682lbs / ft <sup>2</sup> 726,147lbs /yd <sup>2</sup>
<b>Fire Certification</b>	UL94HB
<b>Colours</b>	Translucent natural material, which allows the passage of light, allowing photosynthesis to continue whilst grass is covered. Colour options are available for artificial turf.
<b>Cleaning</b>	High pressure water spray washer
<b>Warranty/ Life Expectancy</b>	Guaranteed for 5 years but has a realistic life expectancy of c. 20 years
<b>Slip Resistance</b>	Integral slip-resistant surface.

*The Strongest, & Most Cost Effective  
Systems Available -  
for EVERY type of event!*

 **terraplas**  
World's No.1 for **Turf** Protection

T: +44 (0)1332 812813 E: terraplas@checkers-safety.com

*Checkers Safety Group UK Ltd t/a Terraplas  
The Barn, Hall Farm House, High Street, Castle Donington,  
Derby, DE74 2PP UK  
Tel: +44(0)1332 812813 Fax: +44(0)1332 853410*

